



# Cambridge®



Colour Featured: **Dual Black**



**5 7/8"**  
EXPOSURE



**FASTLOCK®**  
SEALANT



**IKO®**  
ADVANTAGE  
SIZE



**FULL**  
**COVERAGE**  
(100 SQ FT/3 BUNDLES)

## IKO's Most Popular Shingle Gives You an (Almost) Unfair Advantage.

**IKO Cambridge architectural laminate shingles in IKO's special advantage size** feature a 5 7/8" exposure that is bigger than most in their class. They go down fast and easy. And with full coverage, the job costs associated with extra bundles and the labour to install them are lowered too.

Proper installation is vital for effective weather resistance. That's why we've enlarged our nail line to guide installers for correct nail placement and made our FastLock® modified bitumen sealant thick and aggressive to promote a strong bond.

Homeowners will get the high-end designer architectural appearance without the high-end designer cost.



# Cambridge®

SPECIFICATIONS <sup>4</sup>	Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	40 7/8 in (1038 mm) x 13 3/4 in (349 mm)	STANDARDS <sup>5</sup>	ASTM D3462
	Iron Clad Protection <sup>1</sup>	15 Years (Canada only)	Exposure	5 7/8 in (149 mm)		ASTM D3018
	Limited Wind Warranty <sup>1</sup>	177 km/h (110 mph)	Coverage Per Bundle	33 1/3 ft <sup>2</sup> (3.1 m <sup>2</sup> )		ASTM D7158 – Class H
	Limited High Wind Warranty Upgrade <sup>1,2</sup>	210 km/h (130 mph)	Shingles Per Square	60		ASTM D3161 – Class F
	Blue-Green Algae Resistant <sup>1</sup>	Yes				ASTM E108/UL 790 – Class A
						CSA A123.5



**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final colour selection as the shingle swatches and photography shown online, in brochures and in our **ROOFViewer®** tool may not accurately reflect shingle colour, and do not fully represent the entire colour blend range, nor the impact of sunlight.



**Note:** Product and colour availability may vary by region. <sup>1</sup>See Limited Warranty at [IKO.com](http://IKO.com) for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements <sup>2</sup>High-wind application is required. <sup>3</sup>Lifetime means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the owner owns the building on which the shingles were installed. <sup>4</sup>All values shown are approximate. <sup>5</sup>Products are developed with reference to these standards.

The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature.



To find out more about Cambridge Architectural shingles or additional IKO products, please talk to an IKO sales representative, or contact IKO directly.

Canada **1-855-IKO-ROOF (1-855-456-7663)** United States **1-888-IKO-ROOF (1-888-456-7663)**

Visit us online at: [IKO.COM](http://IKO.COM).





# PERFORMANCE

NORDIC™ & DYNASTY® SHINGLES



Nordic shingles are available in select markets.



Color Featured: **Glacier**



HI-DEF  
COLORS



IKO  
ARMOURZONE®



HIGH-WIND  
RESISTANCE



NORDIC™



DYNASTY®

## For Your Customers Who Want the Best, IKO Offers Two Best-in-Class Shingles.

**Nordic:** Quite possibly the best laminate asphalt shingle money can buy. Offer your customers the peace of mind that comes from knowing they are providing the best for their families. As weather patterns become more unpredictable, Nordic presents your best asphalt shingle option — no matter where your customers live. Not only has this shingle earned a Class 4 impact resistance rating,<sup>3</sup> but it also offers unparalleled wind uplift protection derived from IKO's exclusive ArmourZone technology.

We coat Nordic's durable fiberglass mat with a polymer-modified asphalt for heavy weight, exceptional strength and resilience, high-wind resistance and added flexibility for application in cold temperatures.\* This powerful combo of a durable mat and special asphalt allows IKO Nordic shingles to act as shock absorbers, to help cushion the impact of hail and earn a Class 4 impact resistance rating.\*\*<sup>3</sup>

IKO's ArmourZone is the 1 1/4-inch reinforced nailing area that provides incredible fastening power and helps resist nail pull-through even in high winds of up to 130 mph (210 km/h)<sup>1</sup> with only four nails.

**Dynasty: Wind resistance and fast installation nailed.** Dynasty is an oversized, heavy-duty laminate asphalt shingle that utilizes standard oxidized asphalt instead of a polymer-modified coating and carries a Class 3 impact resistance rating.\*\*<sup>3</sup> Like Nordic, Dynasty also features the ArmourZone, which offers unparalleled nail-holding power, helping the shingle resist high winds. And IKO's FastLock® sealant on every shingle further strengthens Dynasty's defiance of Mother Nature's wrath.

The secondary benefit of ArmourZone's larger nailing area is that it allows for easier and more accurate nailing. Combined with Dynasty's (and Nordic's) 5 7/8-inch exposure and larger-than-average overall size, it goes down faster and covers more area than most average-sized comparable laminate shingles.

Both Nordic and Dynasty are available in IKO's exclusive hi-definition color blends that will make your customer's home the envy of the neighborhood.

\*Manual sealing is required in cold temperatures. See application instructions for full details. \*\*This is not a guarantee of impact resistance against hail. Damage from hail is not covered under the limited warranty. Full details on reverse.



# PERFORMANCE


NORDIC™ & DYNASTY® SHINGLES



Nordic shingles are available in select markets.



SPECIFICATIONS <sup>4</sup>	Limited Warranty <sup>1</sup>	Limited Lifetime <sup>2</sup>	Dimensions (L x W)	40 7/8 in (1,038 mm) X 13 3/4 in (349 mm)	STANDARDS <sup>5</sup>	ASTM D3462
	Iron Clad Protection <sup>1</sup>	15 Years	Exposure	5 7/8 in (149 mm)		ASTM D3018
	Limited Wind Warranty <sup>1</sup>	130 mph (210 km/h)	Coverage per Bundle	33 1/3 ft <sup>2</sup> (3.1 m <sup>2</sup> )		ASTM D7158 – Class H
	Blue-Green Algae Resistant <sup>1</sup>	Yes	Shingles per Square	60		ASTM D3161 – Class F
						ASTM E108/UL 790 – Class A
						FM 4473 – Class 4 <sup>3</sup> (IKO Nordic shingles) – Class 3 <sup>3</sup> (IKO Dynasty shingles)

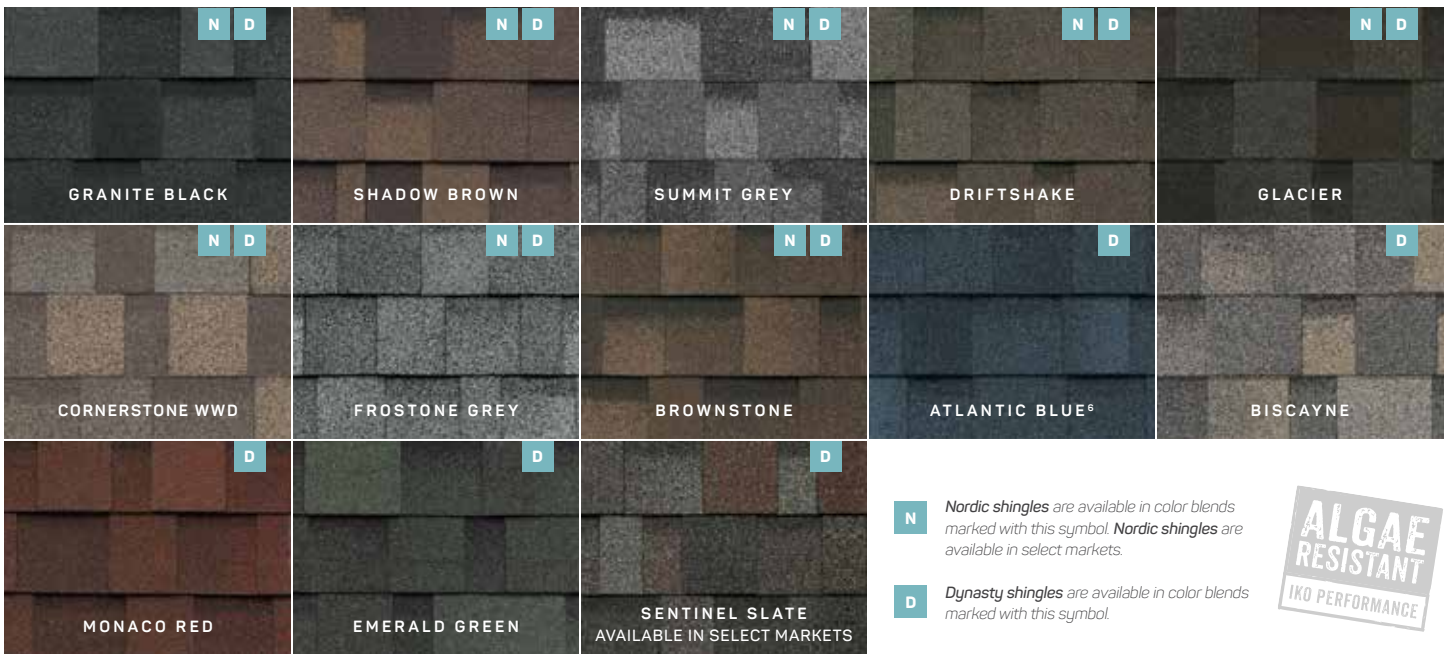

**N** Nordic shingles are available in color blends marked with this symbol. Nordic shingles are available in select markets.

**D** Dynasty shingles are available in color blends marked with this symbol.



**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer**® tool may not accurately reflect shingle color and do not fully represent the entire color blend range nor the impact of sunlight.

**Note:** Product and color availability may vary by region. Products with Miami Dade NOA and FBC product approval listings are available. Meets requirements of the Texas Department of Insurance. Please contact IKO for details. <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>"Lifetime" means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the Owner owns the building on which the shingles were installed. <sup>3</sup>This impact rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer and damage from hail is not covered by the Limited Warranty. IKO recommends the use of its Class 4 impact resistance rated Hip and Ridge cap shingle in conjunction with the use of Class 4 impact resistance rated shingles, and the use of no less than its Class 3 impact resistance rated Hip and Ridge cap shingle in conjunction with the use of Class 3 impact resistance rated shingles. For further detail concerning the FM 4473 standards, visit the FM Approvals website. <sup>4</sup>All values shown are approximate. <sup>5</sup>Products are developed with reference to these standards. <sup>6</sup>Blue granules may fade after extensive exposure to the sun's ultraviolet rays.



The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature.

Find out more about our products now by talking to an IKO sales representative or contact us directly:

**In the United States, call 1-888-IKO-ROOF (1-888-456-7663).**

**In Canada, call 1-855-IKO ROOF (1-855-456-7663). Or visit our website at: IKO.COM.**





# Armourshake™

PERFORMANCE NEVER LOOKED SO GOOD



Color Featured: **Weathered Stone**



**HI-DEF  
COLORS**



**CLASS A FIRE  
RESISTANCE  
RATING**



**FASTLOCK®  
SEALANT**

## One-of-a-Kind Look and Superior All-Weather Performance.

**IKO Armourshake designer laminate shingles** stand above the crowd. Their extra-thick, contoured profile, large dragon's teeth and generous exposure evoke the bold look of natural wood shakes in a range of ultra high-definition colors.

Armourshake shingles carry a Class 3 impact resistance rating<sup>4\*</sup> and a Class A Fire Resistance rating (ASTM E108/UL 790), for peace of mind for you and your customer.

They are engineered to help protect against wind uplift and water penetration for enduring performance in tough weather.

These shingles offer a 5 1/2-inch exposure and 70 shingles to a square. Some competitors' comparable shingles can range up to 90 shingles per square, so IKO Armourshake can give you up to 20% more coverage to go down faster with less waste.



\*Class 4 Impact Resistance rating<sup>4</sup> is also available (Shadow Black only).



# Armourshake™

PERFORMANCE NEVER LOOKED SO GOOD

SPECIFICATIONS <sup>5</sup>	Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>	Dimensions (L x W)	37 3/8 in (950 mm) x 18 11/16 in (475 mm)	STANDARDS <sup>6</sup>	
	Iron Clad Protection <sup>1</sup>	15 Years	Exposure	5 1/2 in (140 mm)		ASTM D3018
	Limited Wind Warranty <sup>1</sup>	110 mph (177 km/h)	Approximate Coverage	Class 3 – Approx. 5 bdls/sq. Class 4 – Approx. 5 bdls/sq.		ASTM D7158 – Class H
	Limited High Wind Warranty Upgrade <sup>1,2</sup>	130 mph (210 km/h)				ASTM D3161 – Class F
	Blue-Green Algae Resistant <sup>1</sup>	Yes	Shingles Per Square	70		ASTM E108/UL 790 – Class A
						FM 4473 – Class 3 <sup>4</sup> Class 4 <sup>4</sup> is also available (Shadow Black only)

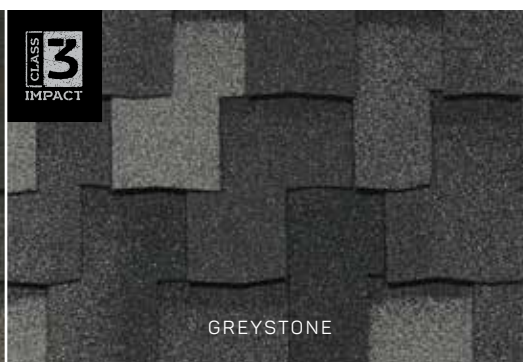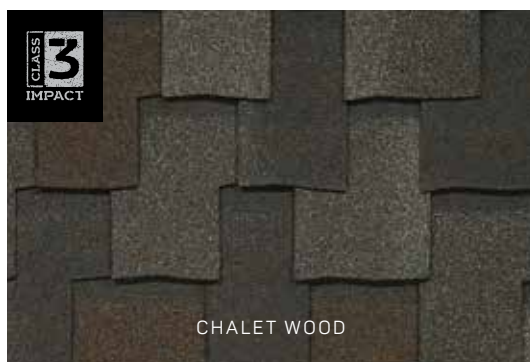

**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer**® tool may not accurately reflect shingle color and do not fully represent the entire color blend range nor the impact of sunlight.



**Note:** Product and color availability may vary by region. Products with Miami Dade NOA and FBC product approval listings are available. Meets requirements of the Texas Department of Insurance. Please contact IKO for details. <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>High-wind application is required. <sup>3</sup>"Lifetime" means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the owner owns the building on which the shingles were installed. <sup>4</sup>This impact rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer and damage from hail is not covered by the Limited Warranty. IKO recommends the use of its Class 4 impact resistance rated Hip and Ridge cap shingle in conjunction with the use of Class 4 impact resistance rated shingles and the use of no less than its Class 3 impact resistance rated Hip and Ridge cap shingle in conjunction with the use of Class 3 impact resistance rated shingles. For further detail concerning the FM 4473 standards, visit the FM Approvals website. <sup>5</sup>All values shown are approximate. <sup>6</sup>Products are developed with reference to these standards.



The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature.

To find out more about Armourshake Designer shingles or additional IKO products, please talk to an IKO sales representative or a professional roofing contractor, or contact IKO directly.

**United States 1-888-IKO-ROOF (1-888-456-7663) | Canada 1-855-IKO-ROOF (1-855-456-7663)**

Visit us online at: [IKO.COM](http://IKO.COM).

